


Pneumatic TIRFOR

The pneumatic TIRFOR machine (model TU-32P) is operated by a self reciprocating pneumatic ram, supplied by compressed air. The TU-32P is particularly suitable for operating on construction sites and industries where there is a danger of explosions eg. oil refineries, chemical industries etc. or in industries which are already provided with compressed air facilities (power stations, shipyards, etc.).

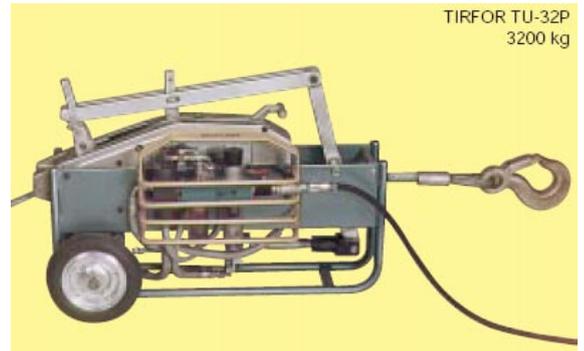

		TU -32P
Nominal capacity (increase of power by multiple sheave blocks)	kg	3200
Speed in forward operation (lifting)	m/mn	0,60 - 0,94
Max. speed rev. operation (lowering)	m/mn	1,80
Operating pressure	bar	4 - 7,5
Flow	l/mn	500- 700
Weight (overall)	kg	88
TIRFOR wire rope diameter	mm	16,3
standard lenght (other lenghts available on request)	m	20