

HEP2 - ELECTRIC DRIVEN PUMPS - GENERAL DUTY MEDIUM FLOW




Low pressure flow rate 7 l/min. up to 70 Bar

High pressure flow rate 0.65 l/min. up to 700 Bar

Two stage hydraulic pump unit

- >> Externally adjustable pressure relief valve
- >> Manual valve with load holding feature fitted as standard
- >> Solenoid valve options available

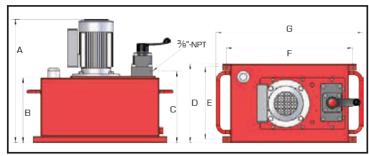

Model	Valve	Oil cap.	Motor	Motor	Weight
number	type	litres	kW	voltage	kg
HEP207111	P-T Plate	10	1.5	110 / 115 V - 1Ph	47.0
HEP207112	P-T Plate	10	1.5	220 / 240 V - 1Ph	47.0
HEP207114	P-T Plate	10	1.5	380 / 440 V - 3Ph	47.0
HEP207121	P-T Plate	25	1.5	110 / 115 V - 1Ph	63.0
HEP207122	P-T Plate	25	1.5	220 / 240 V - 1Ph	63.0
HEP207124	P-T Plate	25	1.5	380 / 440 V - 3Ph	63.0
HEP207211	2-way	10	1.5	110 / 115 V - 1Ph	47.5
HEP207212	2-way	10	1.5	220 / 240 V - 1Ph	47.5
HEP207214	2-way	10	1.5	380 / 440 V - 3Ph	47.5
HEP207221	2-way	25	1.5	110 / 115 V - 1Ph	63.5
HEP207222	2-way	25	1.5	220 / 240 V - 1Ph	63.5
HEP207224	2-way	25	1.5	380 / 440 V - 3Ph	63.5
HEP207311	3-way	10	1.5	110 / 115 V - 1Ph	47.5
HEP207312	3-way	10	1.5	220 / 240 V - 1Ph	47.5
HEP207314	3-way	10	1.5	380 / 440 V - 3Ph	47.5
HEP207321	3-way	25	1.5	110 / 115 V - 1Ph	63.5
HEP207322	3-way	25	1.5	220 / 240 V - 1Ph	63.5
HEP207324	3-way	25	1.5	380 / 440 V - 3Ph	63.5
HEP207411	4-way	10	1.5	110 / 115 V - 1Ph	47.5
HEP207412	4-way	10	1.5	220 / 240 V - 1Ph	47.5
HEP207414	4-way	10	1.5	380 / 440 V - 3Ph	47.5
HEP207421	4-way	25	1.5	110 / 115 V - 1Ph	63.5
HEP207422	4-way	25	1.5	220 / 240 V - 1Ph	63.5
HEP207424	4-way	25	1.5	380/440V-3Ph	63.5

	Dimensions in mm									
Α	В	С	D	Е	F	G				
498	198	230	246	221	368	438				
498	198	230	246	221	368	438				
498	198	230	246	221	368	438				
527	227	259	306	281	490	570				
527	227	259	306	281	490	570				
527	227	259	306	281	490	570				
498	198	230	246	221	368	438				
498	198	230	246	221	368	438				
498	198	230	246	221	368	438				
527	227	259	306	281	490	570				
527	227	259	306	281	490	570				
527	227	259	306	281	490	570				
498	198	230	246	221	368	438				
498	198	230	246	221	368	438				
498	198	230	246	221	368	438				
527	227	259	306	281	490	570				
527	227	259	306	281	490	570				
527	227	259	306	281	490	570				
498	198	230	246	221	368	438				
498	198	230	246	221	368	438				
498	198	230	246	221	368	438				
527	227	259	306	281	490	570				
527	227	259	306	281	490	570				
527	227	259	306	281	490	570				