


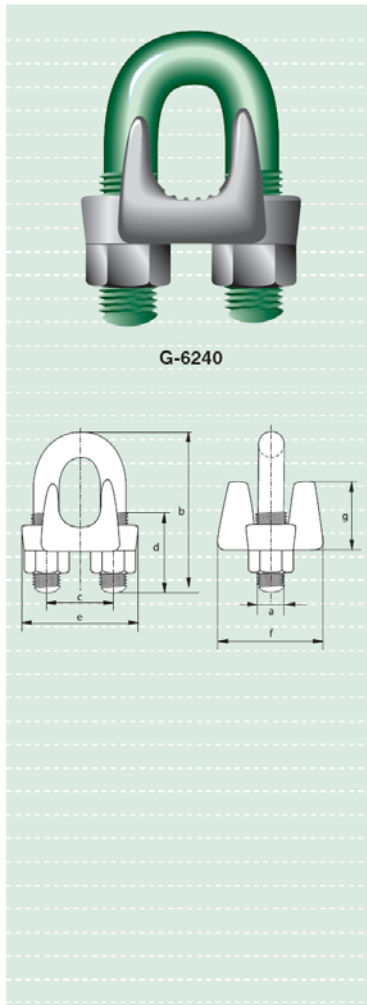

Green Pin® wire rope clips generally to EN 13411-5 Type B

- **Material** : Bridge : drop forged high tensile steel SAE 1035
or SAE 1045
U-bolt : SAE 1015
- **Standard** : EN 13411-5 Type B
Formerly U.S. Federal Specification FF-C-450D
- **Finish** : hot dipped galvanized
nuts for diameter bow 5 and 6 mm are electro-galvanized
- **Certification** : a works certificate can be supplied upon request

diameter wire rope	diameter	length bow	width inside	length thread	length base	thickness base	height base	weight per 100 pcs
inches mm	a mm	b mm	c mm	d mm	e mm	f mm	g mm	mm
$\frac{1}{8}$ 4	5	24	12	11	24	21	10	2
$\frac{3}{16}$ 5	6	31	15	13	29	24	13	4
$\frac{1}{4}$ 7	8	34	19	13	37	30	18	8
$\frac{5}{16}$ 8	10	45	22	19	43	33	19	14
$\frac{3}{8}$ 10	11	49	26	19	49	42	25	19
$\frac{7}{16}$ 11	12	60	30	25	58	46	26	31
$\frac{1}{2}$ 13	13	61	30	25	58	48	31	34
$\frac{9}{16}$ 15	14	72	33	32	63	52	31	36
$\frac{5}{8}$ 16	14	74	33	32	64	54	36	45
$\frac{3}{4}$ 20	16	86	38	37	72	57	38	68
$\frac{7}{8}$ 22	19	98	45	41	80	62	40	108
1 26	19	108	48	46	88	67	47	113
1 $\frac{1}{8}$ 30	19	117	51	51	91	73	48	140
1 $\frac{1}{4}$ 34	22	130	59	54	105	79	56	207
1 $\frac{3}{8}$ 36	22	140	60	59	108	79	58	234
1 $\frac{1}{2}$ 40	22	147	66	60	112	85	64	266
1 $\frac{5}{8}$ 42	25	161	70	67	121	92	67	329
1 $\frac{3}{4}$ 46	29	174	78	70	134	97	76	441
2 52	32	195	86	78	150	113	85	603
2 $\frac{1}{4}$ 58	32	213	98	81	162	116	100	707
2 $\frac{1}{2}$ 65	32	227	105	87	168	119	113	806
2 $\frac{3}{4}$ 72	32	243	112	91	174	127	124	1000
3 78	38	271	121	98	194	135	136	1440